



RoHS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER



Female Header 2.54mm 1 Row H=3.55mm Dual Entry

Specifications

Current Rate:3 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:1000V AC for one minute



Operation Temperature:-40°C to +105°C

Material



Insulator:Hi-Temp. Thermoplastic, UL 94V-0

Terminal:Copper Alloy

Plating:Gold Plated

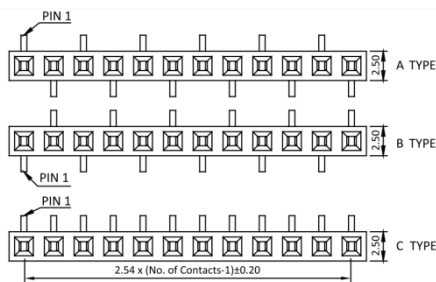


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

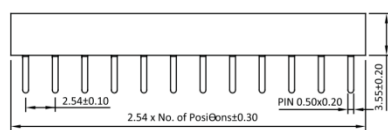

Part No.:PS1B35-1XX-X

ORDER INFORMATION

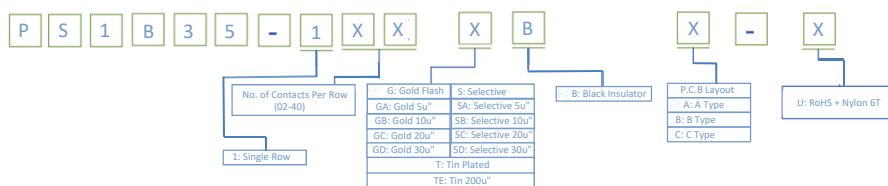

©:Standard Recommend

