



RoHS





# Female Header 2.54mm 1 Row H=5.0mm Dual Entry

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER




Specifications  
 Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C

Material  
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated

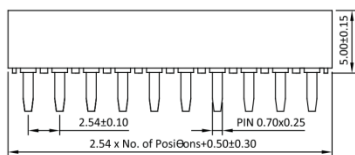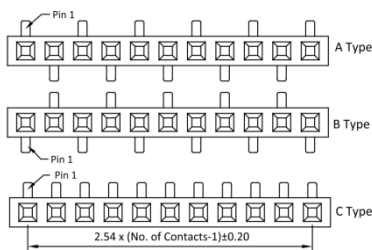

Part No.:PS1B50-1XX-X

## ORDER INFORMATION

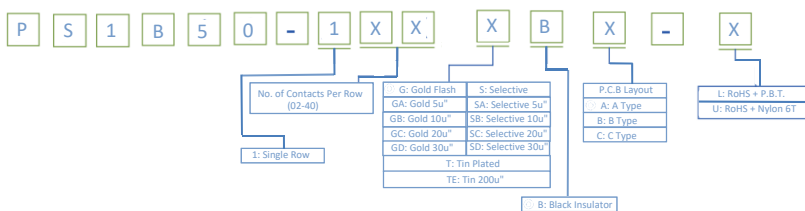

©:Standard Recommend

