



RoHS



# Female Header 2.54mm 2 Row H=8.5mm Pin 0.64x0.60 Elevated

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER





Specifications  
 Current Rate:3 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:1000V AC for one minute  
 Operation Temperature:-40°C to +105°C

Material  
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated




	Dim. A	Dim. B
1B	11.05	7.35
1C	11.05	12.2
1D	11.05	2.30
2A	13.59	4.85
2B	13.59	9.65
3A	16.13	2.30
3B	16.13	7.10
4A	18.67	4.60

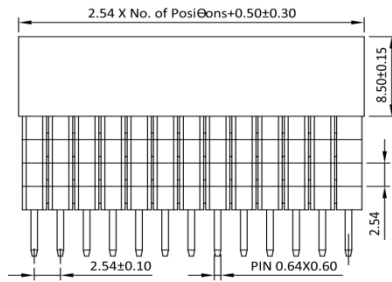

Part No.:PS1E-2XX-X

## ORDER INFORMATION

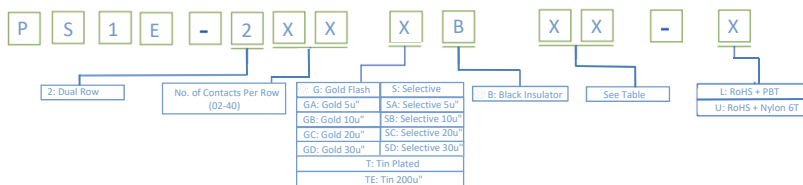

©:Standard Recommend

