

# CONNECTOR MANUFACTURERS

**TOPTek**<sup>®</sup>  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

## Female Header 2.54mm 1 Row H=8.5mm Pin 0.64x0.60 Elevated

### Specifications


Current Rate: 3 AMP  
 Insulation Resistance: 1000MΩ Min.  
 Contact Resistance: 20mΩ Max.  
 Dielectric Voltage: 1000V AC for one minute  
 Operation Temperature: -40°C to +105°C

### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal: Copper Alloy  
 Plating: Gold Plated




Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

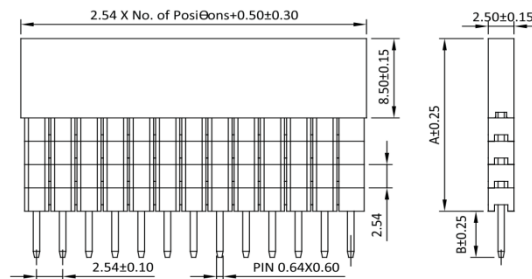

	Dim. A	Dim. B
1B	11.05	7.35
1C	11.05	12.2
1D	11.05	2.30
2A	13.59	4.85
2B	13.59	9.65
3A	16.13	2.30
3B	16.13	7.10
4A	18.67	4.60

Part No.: PS1E-1XX-X

## ORDER INFORMATION

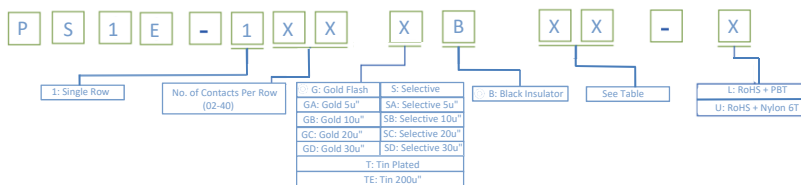

©: Standard Recommend



RoHS