

FEMALE HEADER 2.54mm

Female Header 2.54mm 1 Row H=8.5mm Pin 0.64x0.6 Elevated Type




Specifications


Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C

Material


Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

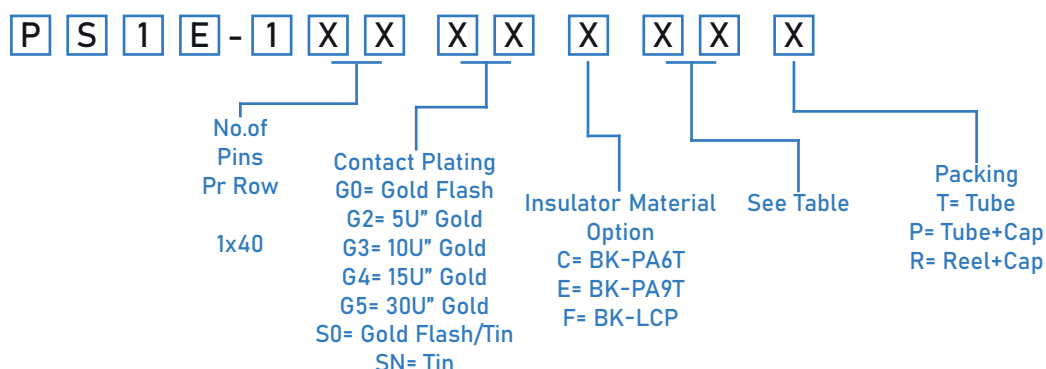

Recommended PCB Layout
(PCB TOLERANCE ±0.05)

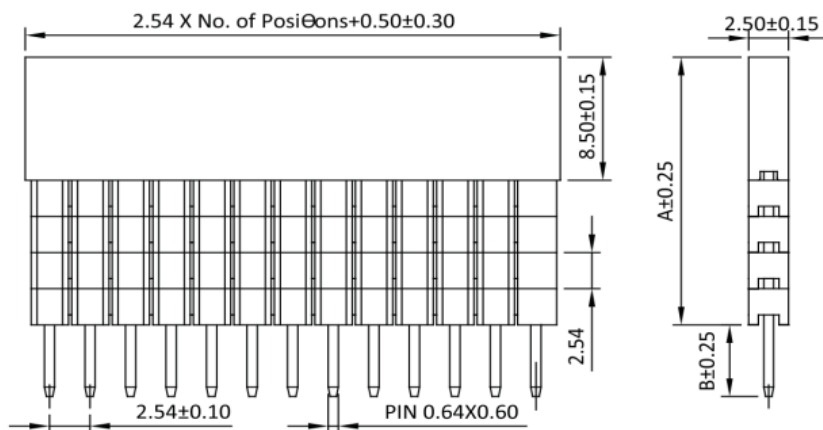

	Dim. A	Dim. B
1B	11.05	7.35
1C	11.05	12.2
1D	11.05	2.30
2A	13.59	4.85
2B	13.59	9.65
3A	16.13	2.30
3B	16.13	7.10
4A	18.67	4.60