



RoHS

Female Header 2.54mm 2 Row H=8.5mm Stripped Type

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER







www.toptek-co.com

Specifications


Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

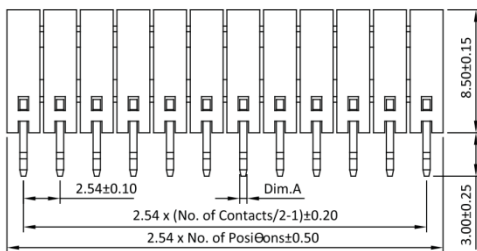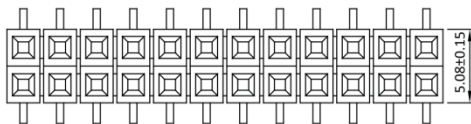


Row	Dim.A
Dual	0.60x0.25



Part No.:PS1F85-2XX-X

ORDER INFORMATION

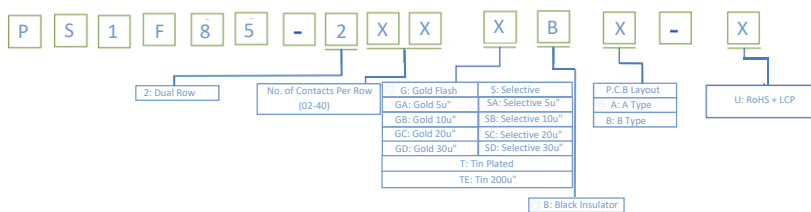

◎:Standard Recommend

