

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Female Header 2.54mm 1 Row H=8.5mm Stripped Type

Specifications


Current Rate: 3 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Material


Insulator: Hi-Temp. Thermoplastic, UL 94V-0
Terminal: Copper Alloy
Plating: Gold Plated



Recommended PCB Layout
(PCB TOLERANCE ±0.05)

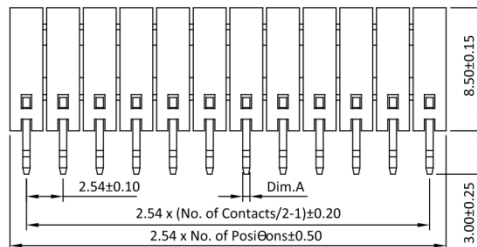


Row	Dim.A
Single	0.50x0.25



Part No.: PS1F85-1XX-X

ORDER INFORMATION

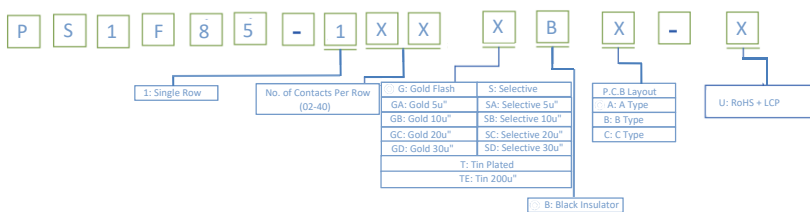

◎: Standard Recommend

