



ROHS

# Female Header 2.54mm 1 Row H=8.5mm Elevated Press Fit

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER




www.toptek-co.com

### Specifications

Current Rate:3 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:20mΩ Max.  
Dielectric Voltage:1000V AC for one minute  
Operation Temperature:-40°C to +105°C



### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
Terminal:Copper Alloy  
Plating:Gold Plated




Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

	Dim. A	Dim. B
1A	11.05	3.20
2A	13.59	3.20
3A	16.13	3.20
4A	18.67	3.20

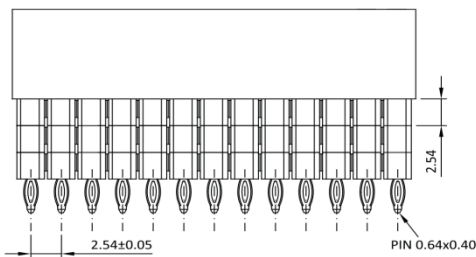

Part No.:PS1FE-1XX-X

## ORDER INFORMATION

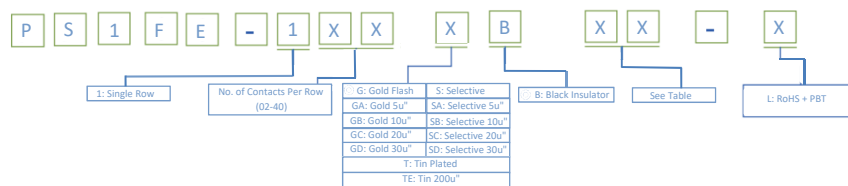

©:Standard Recommend

