

▶ FEMALE HEADER 2.54mm

Female Header 2.54mm 2 Row H=3.55mm SMT Type

TOPTEK®
HARDWARE ELECTRONIC COMPONENTS




Specifications

Current Rate: 3 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max. Dielectric Voltage: 1000V AC for one minute | Operation Temperature: -40°C to +105°C



Material

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated





www.toptek-co.com



▶ ORDER INFORMATION

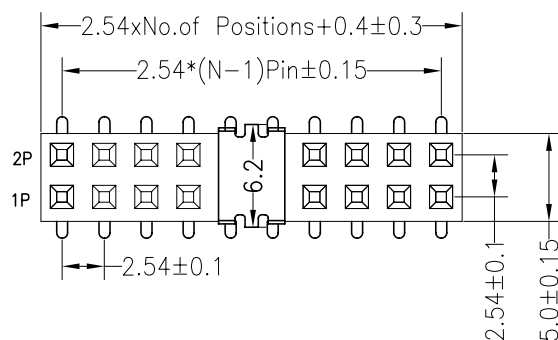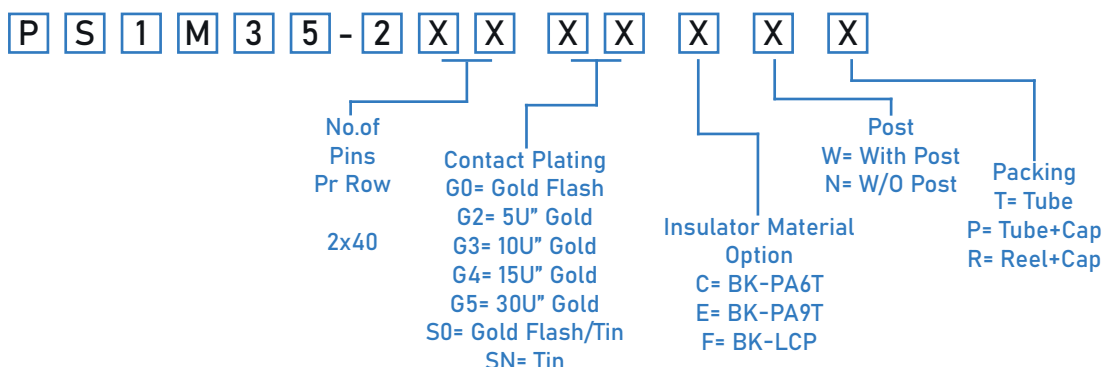

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

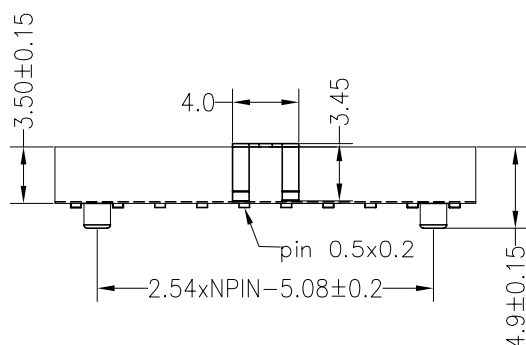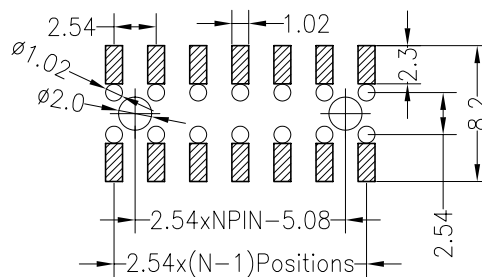

N= W/O Post