

CONNECTOR MANUFACTURERS





TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Female Header 2.54mm 2 Row H=8.5mm SMT Type


Specifications
 Current Rate:3 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:1000V AC for one minute
 Operation Temperature:-40°C to +105°C

Material
 Insulator:Hi-Temp. Thermoplastic, UL 94V-0
 Terminal:Copper Alloy
 Plating:Gold Plated

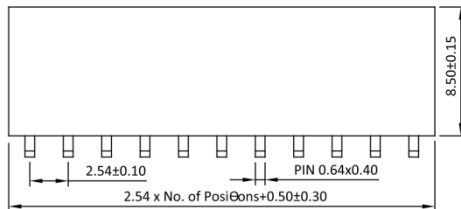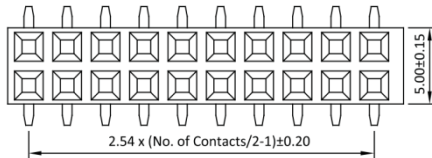

Part No.:PS1M85-2XX-U

ORDER INFORMATION

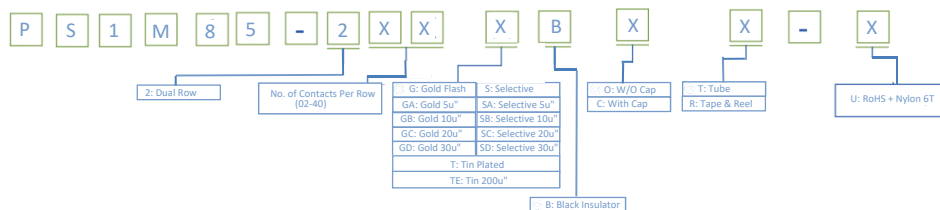

©:Standard Recommend

