

**RoHS**

Female Header 2.54mm 3 Row H=8.5mm SMT Right Angle

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER


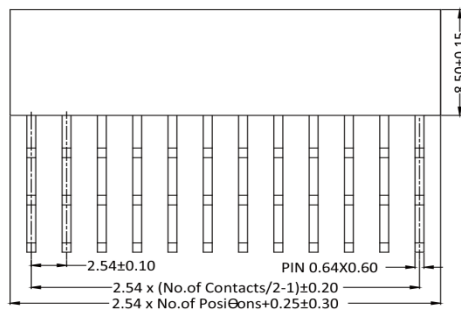



www.toptek-co.com

Specifications

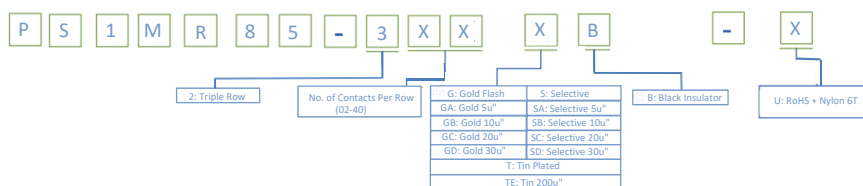
Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

**Part No.:PS1MR85-3XX-U**

ORDER INFORMATION



©:Standard Recommend