



RoHS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER






Female Header 2.54mm 2 Row Side Entry SMT Type

Specifications

Current Rate:3 AMP
Insulation Resistance:1000MΩ Min.
Contact Resistance:20mΩ Max.
Dielectric Voltage:1000V AC for one minute
Operation Temperature:-40°C to +105°C

Material


Insulator:Hi-Temp. Thermoplastic, UL 94V-0
Terminal:Copper Alloy
Plating:Gold Plated

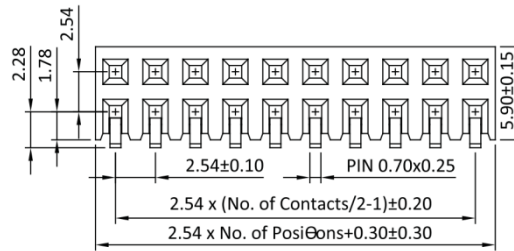

Dual Row
Recommended PCB Layout
(PCB TOLERANCE ±0.05)

Part No.:PS1MS-2XX-X

ORDER INFORMATION

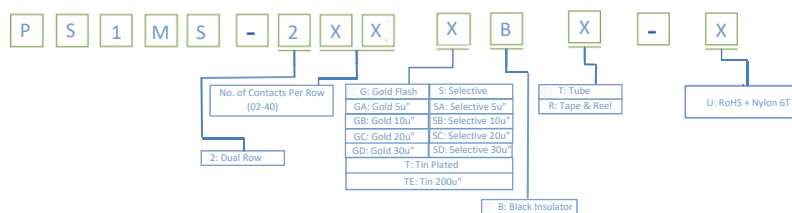

©:Standard Recommend

