

CONNECTOR MANUFACTURERS

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER



www.toptek-co.com





Female Header 2.54mm 2 Row H=6.8mm Straight Type

Specifications

Current Rate: 3 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C


Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

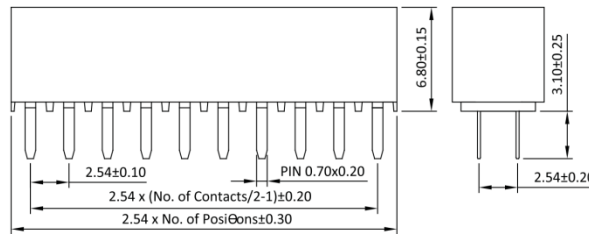

Part No.: PS1S68A-2XX-X

ORDER INFORMATION

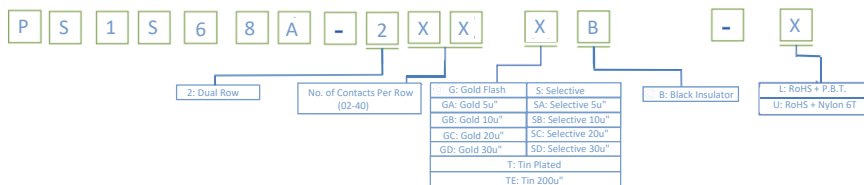

◎: Standard Recommend



ROHS