

# CONNECTOR MANUFACTURERS

**TOPTek®**  
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



## Female Header 2.54mm 2 Row H=8.5mm Straight Type

### Specifications


Current Rate: 3 AMP  
Insulation Resistance: 1000MΩ Min.  
Contact Resistance: 20mΩ Max.  
Dielectric Voltage: 1000V AC for one minute  
Operation Temperature: -40°C to +105°C

### Material

Insulator: Hi-Temp. Thermoplastic, UL 94V-0  
Terminal: Copper Alloy  
Plating: Gold Plated




Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

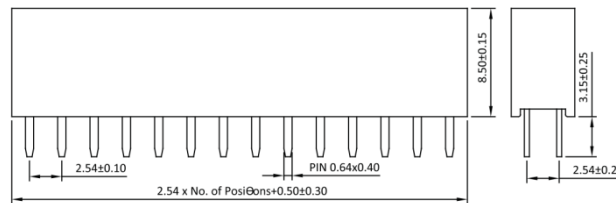

Part No.: PS1S85-2XX-X

## ORDER INFORMATION

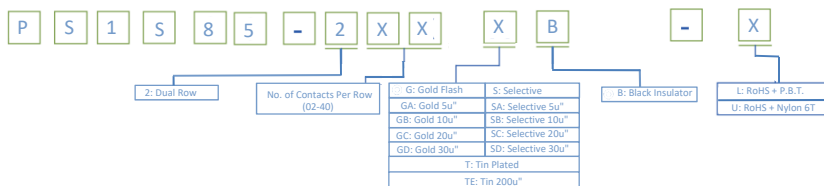

©: Standard Recommend

