

FEMALE HEADER 2.00mm

Female Header 2.0mm 2 Row H=2.1/2.8mm SMT Type




Specifications


Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature:-40°C to +105°C

Material




Insulator:Polyester, UL 94V-0 | Standard:PBT or nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

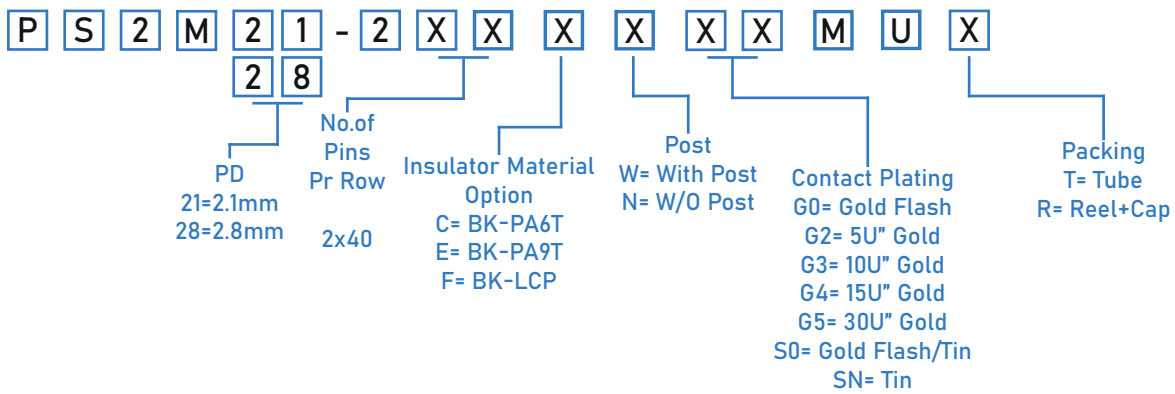

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

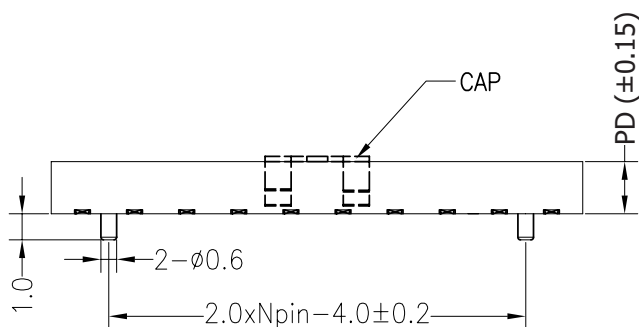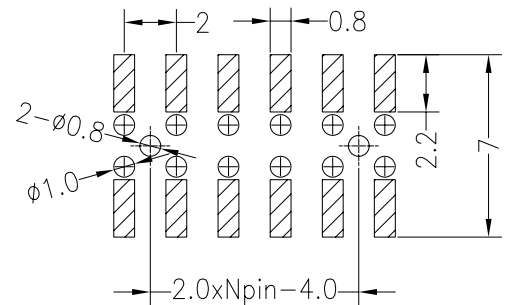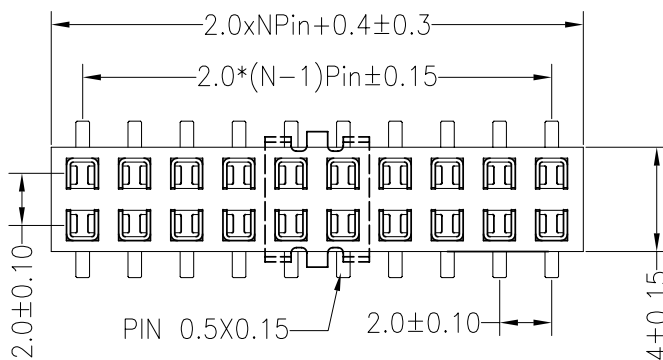

PD
2.10mm
2.80mm

