

► FEMALE HEADER 2.00mm

Female Header 2.0mm 1 Row Side Entry SMT Type



RoHS
2002/95/EC

Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material


Insulator: Polyester, UL 94V-0 | Standard: PBT or nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated

TOPTTEK®

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com



► ORDER INFORMATION

P S 2 M S - 1 X X X N X X M U X

No. of
Contacts
Pr Row





1x40

Insulator Material
Option
C= BK-PA6T
E= BK-PA9T
F= BK-LCP

Post
W= With Post
N= W/O Post

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/Tin
SN= Tin

Packing
T= Tube
R= Reel+Cap

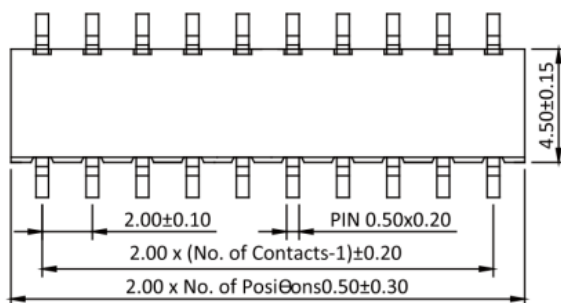

Recommended PCB Layout
(PCB TOLERANCE ±0.05)