

FEMALE HEADER 2.00mm

Female Header 2.0mm 2 Row H=4.3 U Type

TOPTTEK[®]
HARDWARE ELECTRONIC COMPONENTS




Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester, UL 94V-0 | Standard:PBT or nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated

www.toptek-co.com



ORDER INFORMATION

P S 2 S 4 3 C - 2 X X X N X X S - U - T

No.of Pins
Pr Row





2x40

Insulator Material
Option
C= BK-PA6T
E= BK-PA9T
F= BK-LCP

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/Tin
SN= Tin

Packing
T= Tube
R= Reel+Cap

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

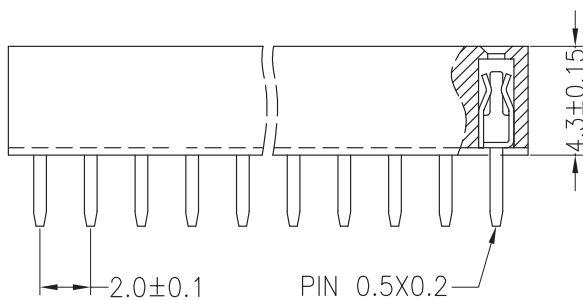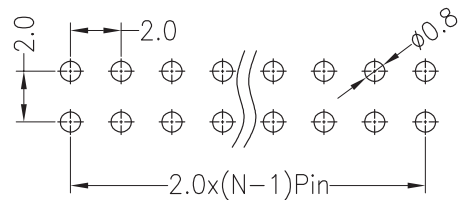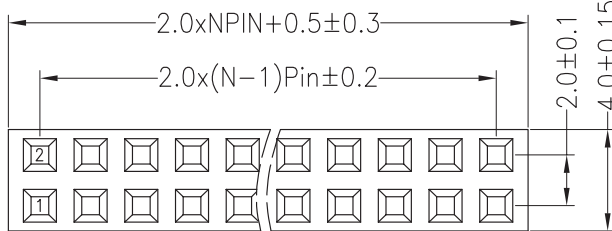

FEMALE HEADER 2.00mm

Female Header 2.0mm 2 Row H=4.3 0 Type

TOPTTEK[®]

HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com




RoHS 2002/95/EC

Specifications

Current Rate: 2 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ | Max. Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0 | Standard: PBT or nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



ORDER INFORMATION

P S 2 S 4 3 C - 2 X X X N X X S - 0 - T

No. of Pins
Pr Row
2x40

Insulator Material
Option
C= BK-PA6T
E= BK-PA9T
F= BK-LCP

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/Tin
SN= Tin

Packing
T= Tube
R= Reel+Cap

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

