

CONNECTOR MANUFACTURERS

TOPTEK®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Female Header 3.96mm 1 Row H=8.89mm SMT Type

Specifications



Current Rate: 7 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 1000V AC for one minute
 Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
 ©Standard: LCP
 Terminal: Copper Alloy
 Plating: Tin Plated

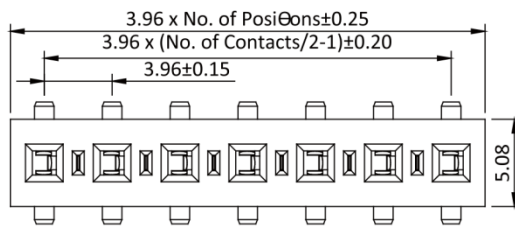


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

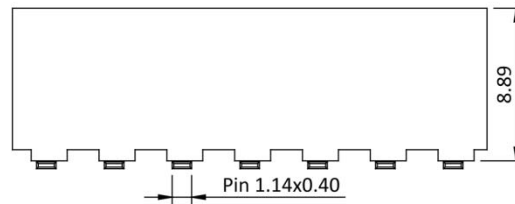

Part No.: PS396M89-1XX-X

ORDER INFORMATION

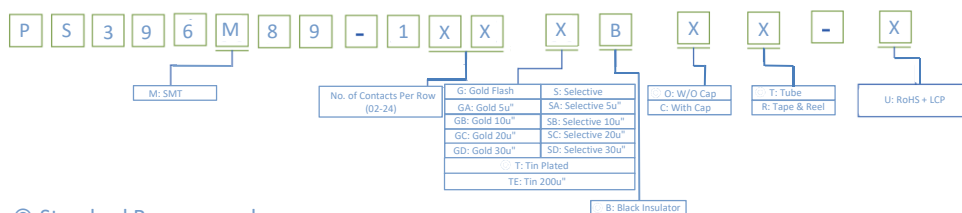

©: Standard Recommend



ROHS