



# in-Female Header 1.27 mm



ROHS

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER



www.toptek-co.com




## Female Header 1.27mm 2 Row H=4.3mm Kinked Type

### Specifications


Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:20mΩ Max.  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
Terminal:Copper Alloy  
Plating:Gold Plated

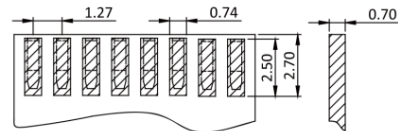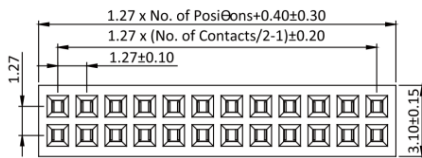


Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

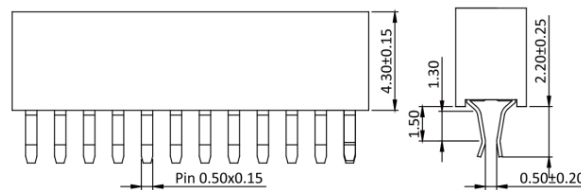

Part No.:PS3K43-2XX-U

## ORDER INFORMATION

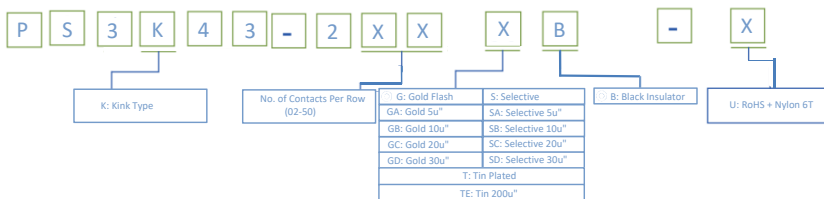

©:Standard Recommend

