

FEMALE HEADER 1.7mm

Female Header 1.7mm 2 Row H=2.1mm SMT Type




Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature: -40°C to +105°C



Material

Insulator:Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated






ORDER INFORMATION

P	S	3	M	2	1	-	2	X	X	X	X	X	X	M	U	X
							No. of Pins Pr Row	Insulator Material Option		Post W= With Post N= W/O Post	Contact Plating			Packing		
							2x40	A=BK-PBT B=BK-PA66 C=BK-PA6T D=BKPA46 F=BK-LCP			G0= Gold Flash G2= 5U" Gold G3= 10U" Gold G4= 15U" Gold G5= 30U" Gold S0= Gold Flash/ Tin SN= Tin			T= Tube P= Tube R= Reel+Cap		

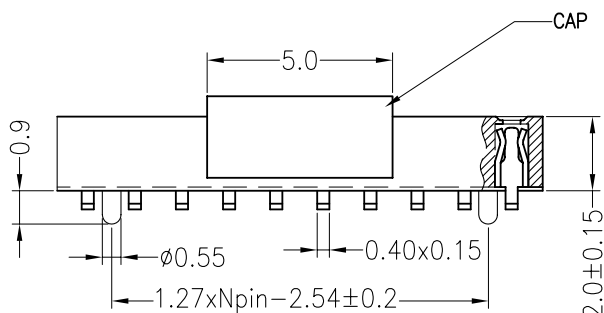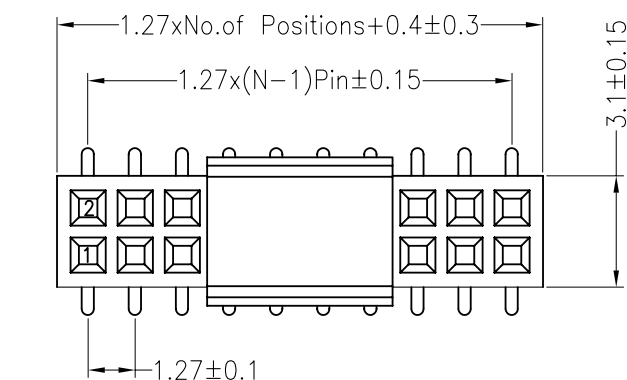

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

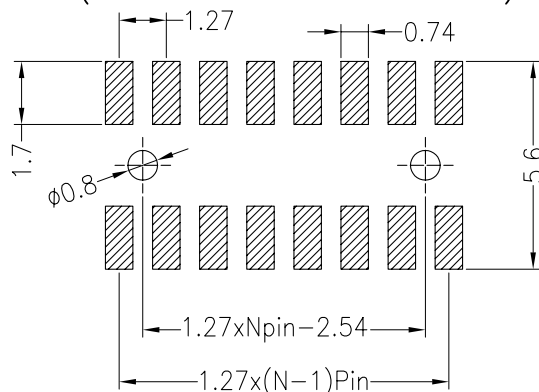

N= W/O Post

W= With Post