



Female Header 1.27mm 1 Row H=3.4 Straight Type




Specifications
 Current Rate: 1 AMP
 Insulation Resistance: 1000MΩ Min.
 Contact Resistance: 20mΩ Max.
 Dielectric Voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C

Material
 Insulator: Hi-Temp. Thermoplastic, UL 94V-0
 Terminal: Copper Alloy
 Plating: Gold Plated

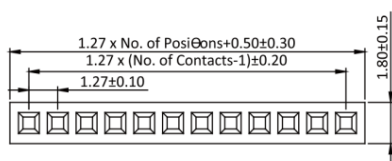


Recommended PCB Layout (PCB TOLERANCE ± 0.05)

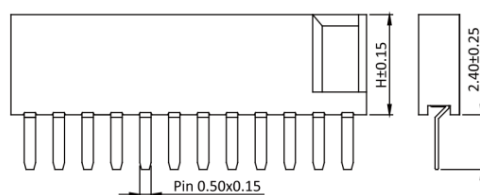

Part No.: PS3S34 -1XX-U

ORDER INFORMATION

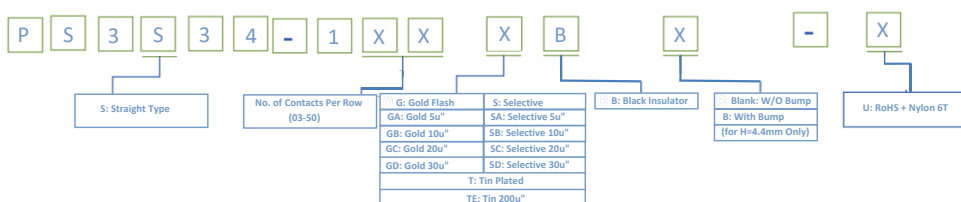

©: Standard Recommend

