


TOPTEK®
HARDWARE ELECTRONIC COMPONENTS

 www.toptek-co.com

Insulator: Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated



P S 3 S 3 4 - 2 X X X N X X S U X



PD
34= 3.4mm
44= 4.4mm

No.of Pins
Pr Row
2x40

Insulator Material
Option
C= BK-PA6T
E= BK-PA9T
F= BK-LCP

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/Tin
SN= Tin

Packing
T= Tube
P= Tube
R= Reel+Cap

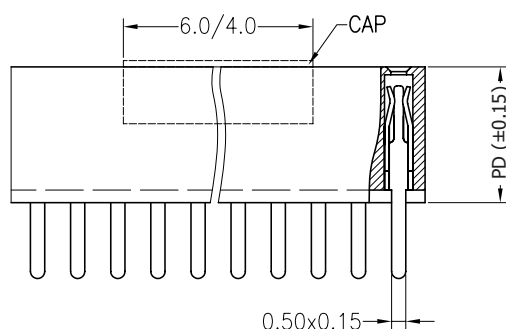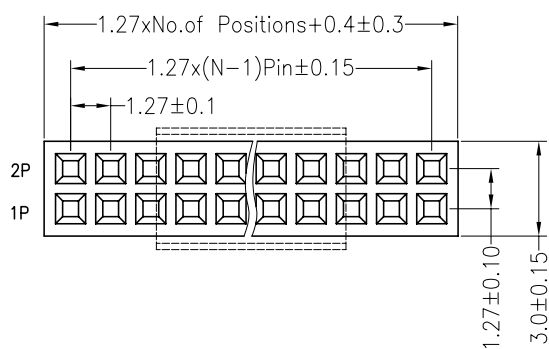

PD
3.4mm
4.4mm

