

Female Header 1.27mm 2 Row H=4.4 Straight Type

TOPTTEK[®]
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com

Specifications

Current Rate:1 AMP

Insulation Resistance:1000MΩ Min.

Contact Resistance:20mΩ Max.

Dielectric Voltage:500V AC for one minute






Operation Temperature:-40°C to +105°C

Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0


Terminal:Copper Alloy

Plating:Gold Plated

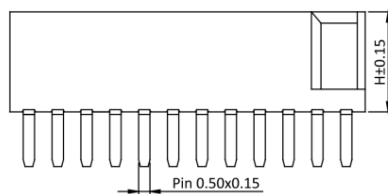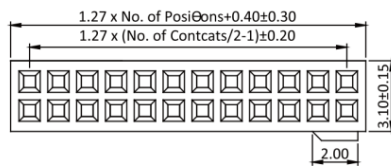

Part No.:PS3S44-2XX-U

ORDER INFORMATION

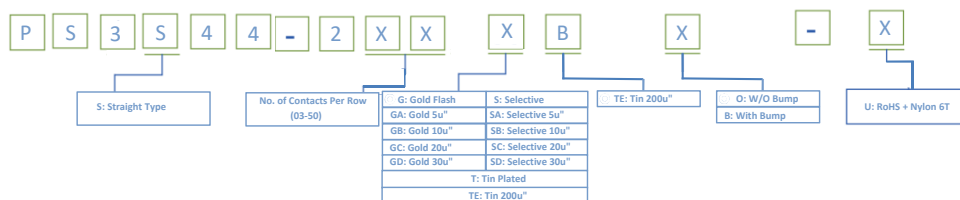

©:Standard Recommend

