





## Female Header 1.27mm 2 Row H=5.7 SMT Type

### Specifications

Current Rate:1 AMP  
 Insulation Resistance:1000MΩ Min.  
 Contact Resistance:20mΩ Max.  
 Dielectric Voltage:500V AC for one minute  
 Operation Temperature:-40°C to +105°C


### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
 Terminal:Copper Alloy  
 Plating:Gold Plated

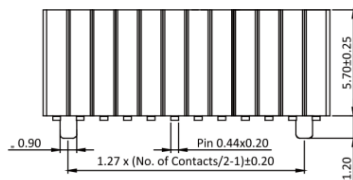

Part No.:PS4M57-2XX-U

## ORDER INFORMATION

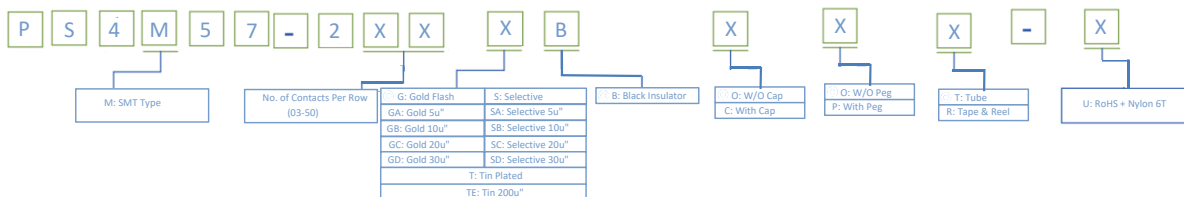

©:Standard Recommend