



# in-Female Header 1.27 mm



ROHS

## Female Header 1.27mm 1 Row H=4.6 Straight Type

TOPTEK®  
HARDWARE ELECTRONIC MANUFACTURER





www.toptek-co.com

### Specifications


Current Rate:1 AMP  
Insulation Resistance:1000MΩ Min.  
Contact Resistance:20mΩ Max.  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-40°C to +105°C

### Material

Insulator:Hi-Temp. Thermoplastic, UL 94V-0  
Terminal:Copper Alloy  
Plating:Gold Plated




Recommended PCB Layout  
(PCB TOLERANCE ±0.05)

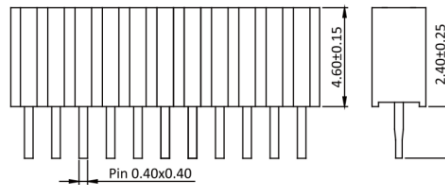

Part No.:PS4S46-1XX-U

## ORDER INFORMATION

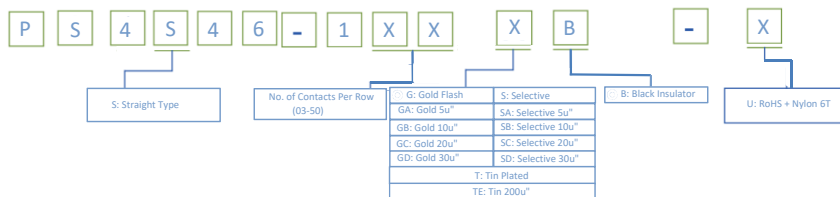

©:Standard Recommend

