

FEMALE HEADER 1.7mm

Female Header 1.7mm 2 Row H=8.5mm Straight Type

TOPTTEK®
HARDWARE ELECTRONIC COMPONENTS




Specifications

Current Rate: 1 AMP | Insulation Resistance: 1000MΩ | Min. Contact Resistance: 20mΩ |
Max.Dielectric Voltage: 500V AC for one minute | Operation Temperature:-40°C to +105°C

Material

Insulator:Polyester, UL 94V-0 | Standard: Nylon 6T | Terminal: Copper Alloy | Plating: Gold Plated

www.toptek-co.com



ORDER INFORMATION

P S 4 S 8 5 - 2 X X X N X X S Y X


No.of Pins
Pr Row

2x40

Insulator Material
Option
C= BK-PA6T
E= BK-PA9T
F= BK-LCP

Contact Plating
G0= Gold Flash
G2= 5U" Gold
G3= 10U" Gold
G4= 15U" Gold
G5= 30U" Gold
S0= Gold Flash/Tin
SN= Tin

Packing
T= Tube
P= Tube
R= Reel+Cap

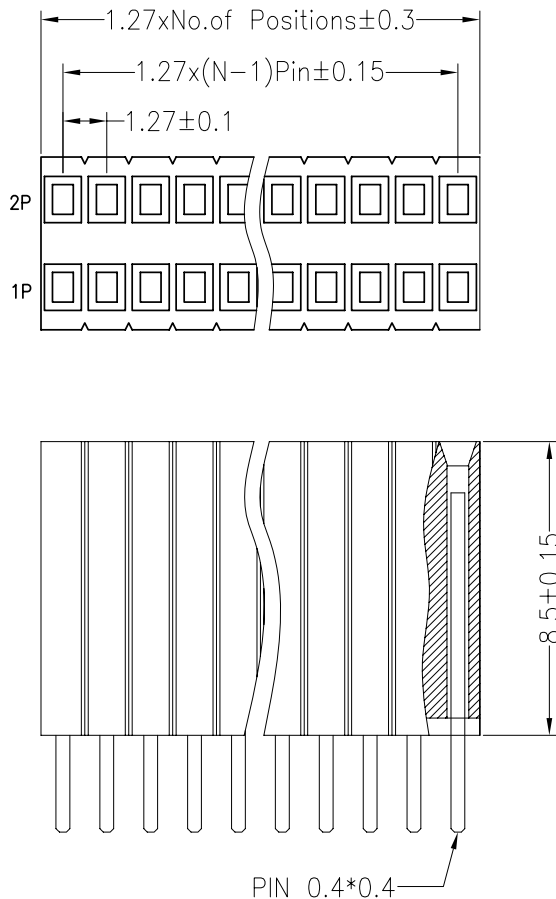

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

