

CONNECTOR MANUFACTURERS

TOPTek®
HARDWARE ELECTRONIC MANUFACTURER

www.toptek-co.com



Female Header 5.08mm 1 Row H=8.9mm SMT Type

Specifications



Current Rate: 7 AMP
Insulation Resistance: 1000MΩ Min.
Contact Resistance: 20mΩ Max.
Dielectric Voltage: 1000V AC for one minute
Operation Temperature: -40°C to +105°C

Material

Insulator: Polyester, UL 94V-0
©Standard: LCP
Terminal: Copper Alloy
Plating: Tin Plated

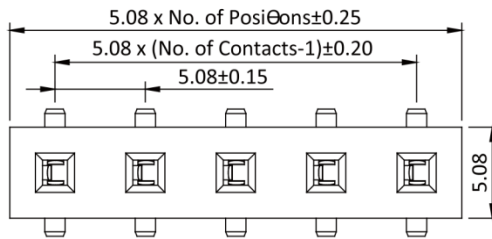


Recommended PCB Layout
(PCB TOLERANCE ±0.05)

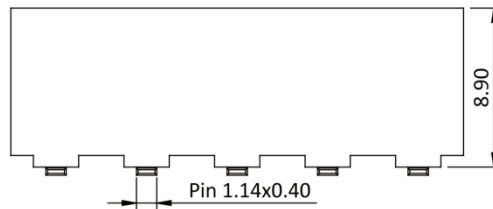

Part No.: PS8M89-1XX-X

ORDER INFORMATION

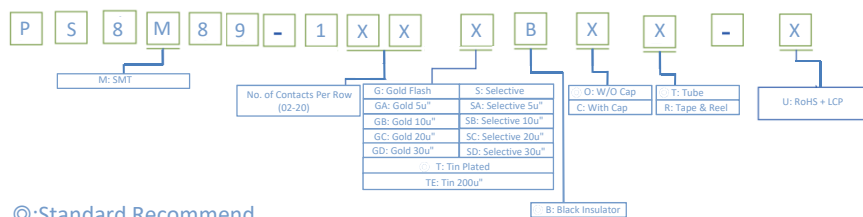

©: Standard Recommend



RoHS