



S.ATA Conn. Series

Specifications

Current Rate:1.5 AMP

Insulation Resistance: $1000 \mathrm{M}\Omega$ Max

Contact Resistance:30 m Ω Min

Dielectric Voltage:500V AC for one minute Operation Temperature:-55 °C to +125 °C

Material

Insulator:Polyester,UL 94V-0


©Standard:LCP

Terminal:Brass


Plating:Selective Plating

Pin Number	Signal Name
S1	GND
S2	A+
S3	A-
S4	GVD
S5	B-
S6	B+
S7	GND

Pin Number	Power Line Designation
P1	DP
P2	+5V
P3	+5V
P4	MD
P5	GND
P6	GND

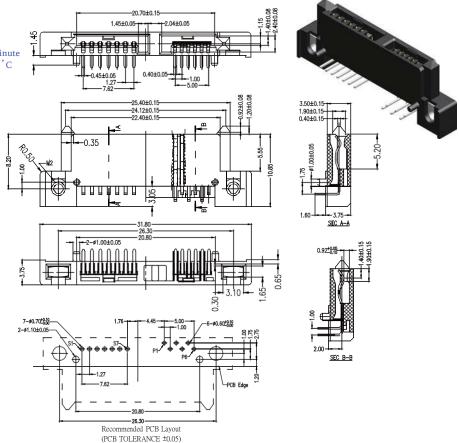

Specifications

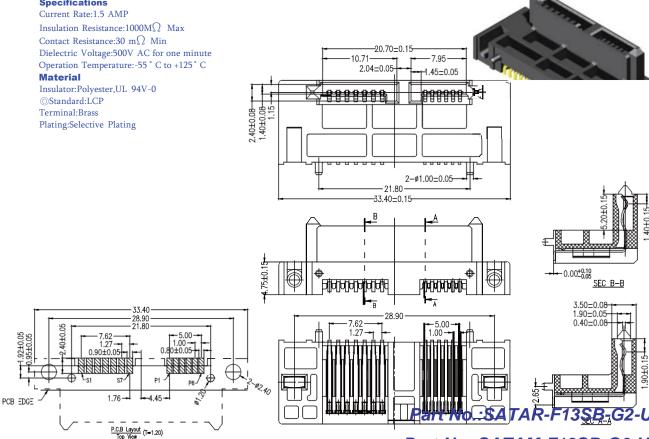

Part No.:SATAM-F13SB-G6-U