


## S.ATA Conn. Series

**Specifications**

Current Rate:1.5 AMP  
Insulation Resistance:1000M Ω Min  
Contact Resistance:30 m Ω Max  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-55 ° C to +125 ° C

**Material**

Insulator:Polyester,UL 94V-0  
©Standard:PBT  
Terminal:Phosphor Bronze  
Plating:Selective Plating

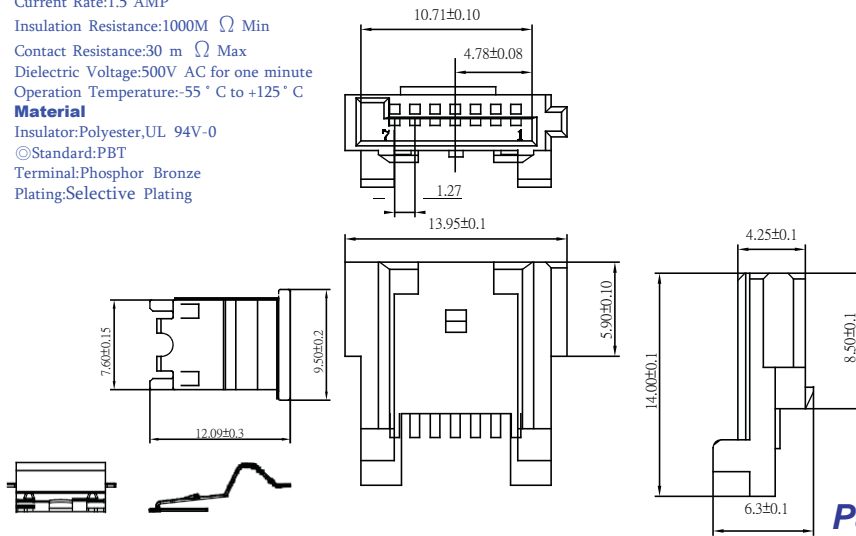



**Part No.:SATASL-F07SB-L**

**Specifications**

Current Rate:1.5 AMP  
Insulation Resistance:1000M Ω Min  
Contact Resistance:30 m Ω Max  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-55 ° C to +125 ° C

**Material**

Insulator:Polyester,UL 94V-0  
©Standard:PBT  
Terminal:Phosphor Bronze  
Plating:Selective Plating

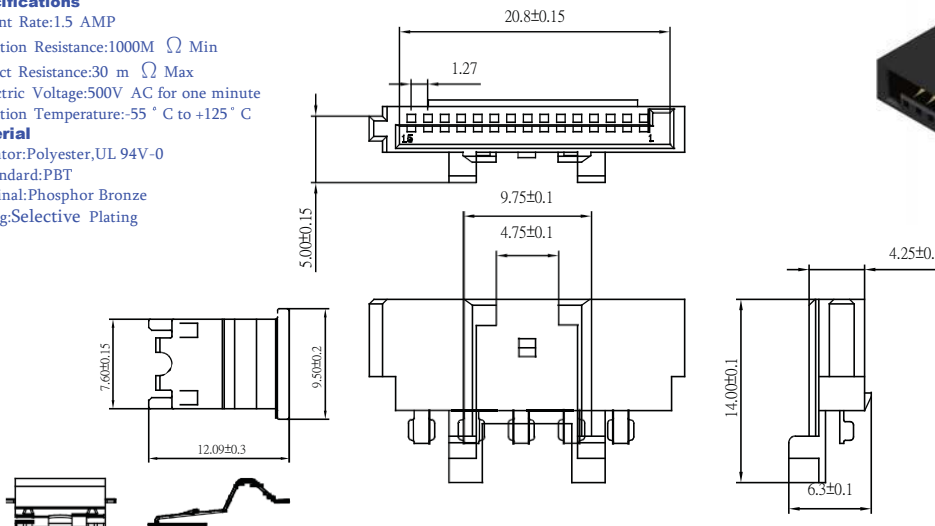


**Part No.:SATASL-F15SB-L**

**Specifications**

Current Rate:1.5 AMP  
Insulation Resistance:1000M Ω Min  
Contact Resistance:30 m Ω Max  
Dielectric Voltage:500V AC for one minute  
Operation Temperature:-55 ° C to +125 ° C

**Material**

Insulator:Polyester,UL 94V-0  
©Standard:PBT  
Terminal:Phosphor Bronze  
Plating:Selective Plating

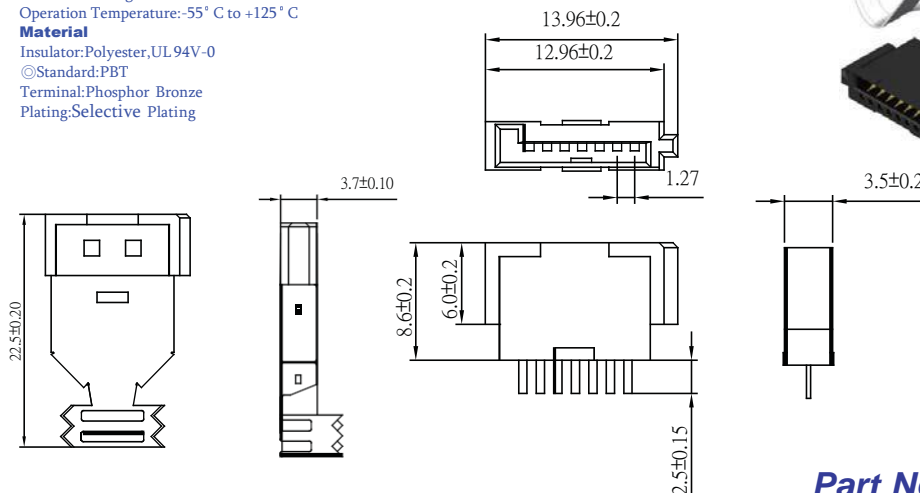

**Part No.:SATASS-F07SB-L**