




SMA Conn. Series

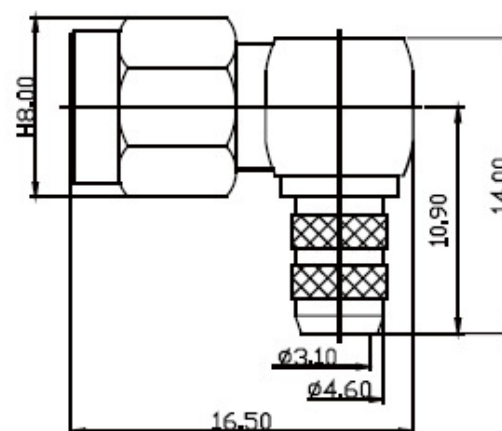

SMA002-M  **GW-L**
5:50 Ω 7:75 Ω 

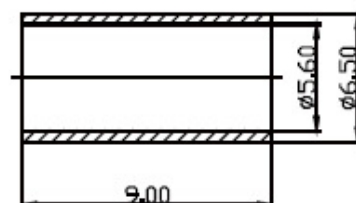

9	NUT	BRASS	GOLD	1
8	FERRULE	BRASS	GOLD	1
7	MALE CONTACT	BRASS	GOLD	1
6	INNER BODY	BRASS	GOLD	1
5	WASHER	BRASS	GOLD	1
4	GASKET	SILICONE		1
3	INSULATOR	TEFLON		1
2	BODY	BRASS	GOLD	1
1	CONTACT BODY	BRASS	GOLD	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE	50/75 OHM
FREQUENCY	0-12 GHz
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS	1000V
WORKING VOLTAGE DC	500V
INSULATION RESISTANCE	5000 MEGOHMS MIN
CONTACT RESISTANCE	INNER CONDUCTOR OUTER CONDUCTOR
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTOR RIGHT ANGLE CONNECTOR
	≤ 3 MILLIOHMS ≤ 0.5 MILLIOHMS 15 dB MAX. AT 1.0GHz 30 dB MAX. AT 1.0GHz

TOPTEK
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com