


SMA Conn. Series



SMA004-M  GW-L

5:50 Ω 7:75 Ω

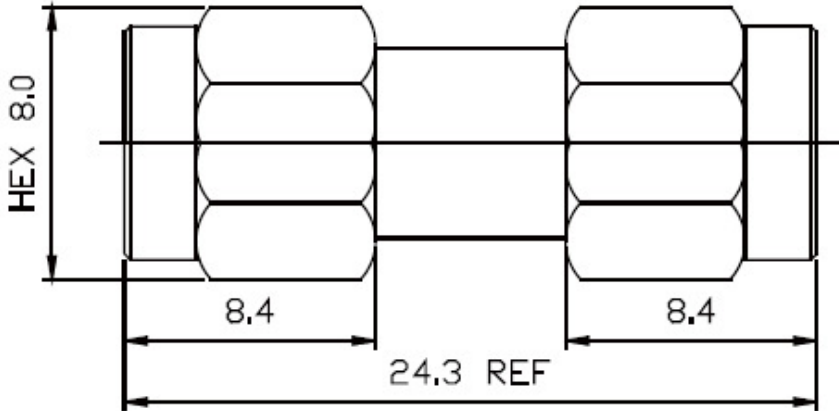

6	GASKET	RUBBER	RED	2
5	RETAINING RING	BRASS	NICKEL	2
4	SHELL	BRASS	NICKEL	2
3	DIELECTRIC	TEFLON		2
2	PIN	BRASS	GOLD	1
1	BODY	BRASS	NICKEL	1
NO	DESCRIPTION	MATERIAL	FINISH	QTY

IMPEDANCE	50/75 OHM
FREQUENCY	0-12 GHz
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS	1000V
WORKING VOLTAGE DC	500V
INSULATION RESISTANCE	5000 MEGOHMS MIN
CONTACT RESISTANCE	INNER CONDUCTOR ≤ 3 MILLIOHMS OUTER CONDUCTOR ≤ 0.5 MILLIOHMS
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTOR .15 dB MAX. AT 1.0GHz RIGHT ANGLE CONNECTOR .30 dB MAX. AT 1.0GHz

TOPTEK
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com