

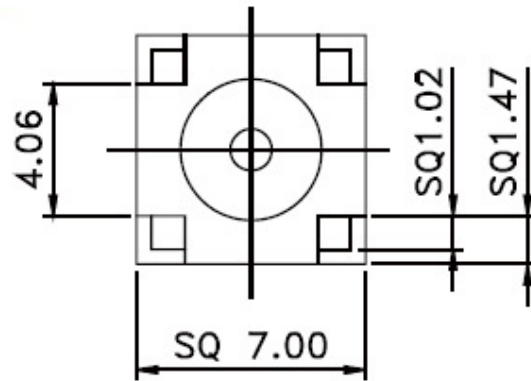


SMA Conn. Series

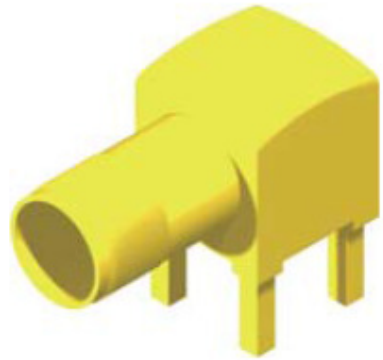

SMA009-F  **GW-L**

5:50 Ω 7:75 Ω 

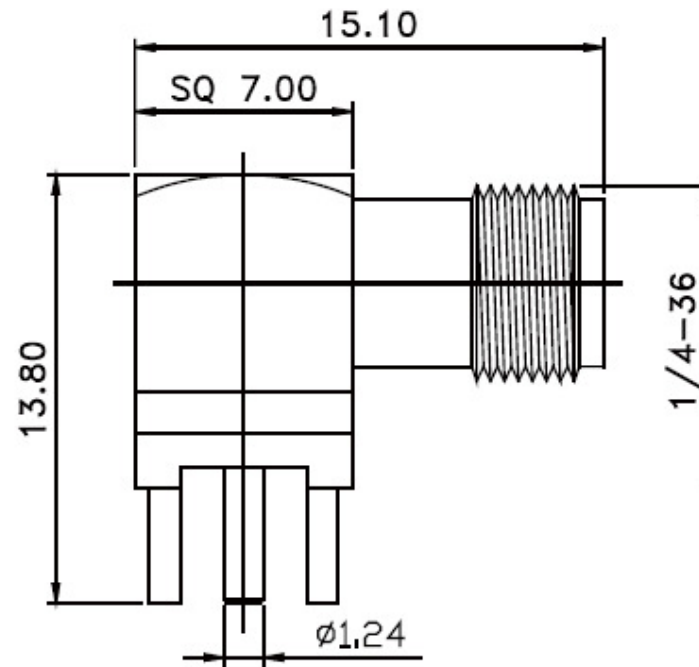

NO	DESCRIPTION	MATERIAL	FINISH	QTY
5	DIELECTRIC	TEFLON		1
4	DIELECTRIC	TEFLON		1
3	PIN	BRASS	GOLD	1
2	BODY	BRASS	GOLD	1
1	BODY	BRASS	GOLD	1

IMPEDANCE	50/75 OHM	
FREQUENCY	0-12 GHz	
DIELECTRIC WITHSTANDING VOLTAGE 50 Hz RMS	1000V	
WORKING VOLTAGE DC	500V	
INSULATION RESISTANCE	5000 MEGOHMS MIN	
CONTACT RESISTANCE	INNER CONDUCTOR	≤ 3 MILLIOHMS
	OUTER CONDUCTOR	≤ 0.5 MILLIOHMS
INSERTION LOSS (dB MAX.)	STRAIGHT CONNECTOR	.15 dB MAX. AT 1.0GHz
	RIGHT ANGLE CONNECTOR	.30 dB MAX. AT 1.0GHz

TOPTTEK
HARDWARE ELECTRONIC COMPONENTS



www.toptek-co.com